HELIUS










Helius LED Modular Luminaire is the perfect solution for all indoor lighting with Simple and Stylish Design

With the ability to be installed Suspended or Recessed and the possibility to create all sorts of linear, corner, T or cross over connections it adapts to all surfaces

Is the most suitable lighting for Retail & Office applications as it provides uniform lighting throughout the space with 120 $^{\rm o}$ beam angle and efficiency of up to 140lm/w



Helius Suspended & Surface

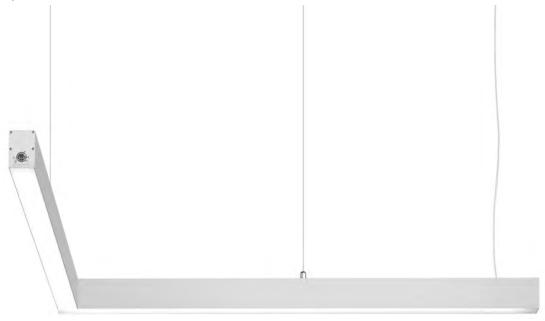

Helius can be adjusted to all kind of existing or new projects from 1m to 50m length or more, the Modular System allows the seamless connection between Helius with the final result as a continuous line without visible shadowing

The standard size of Helius is 1000mm or 2000mm and others are available upon customization





AUSTRIA CERTIFIED ISOSO01: 2015 no. 20100163000579 ISO14001: 2015 no. 20101483003844 TÜV AUSTRIA CERT GMBH

Helius Recessed



Accessories

with the Node connectors is possible to install corners and cross-links






Models	power	standard length* (mm)	lumen output (Im)	size (mm)
LC-HLS02410(R/S)	24W	1000	3360	Suspended 50x75
LC-HLS04810(R/S)	48W	1000	6720	
LC-HLS04820(R/S)	48W	2000	6720	Surface
LC-HLS09620(R/S)	96W	2000	13.440	95x75

R - recessed S - surface

the power supply is built-in the luminaire so don't need extra space in the ceiling




Recessed type can be installed in all sorts of false ceiling or wall - drywall, wood, plaster, metal etc


Specifications

•	
nput	230V~50Hz
power factor	> 90 %
CRI	> 70
ССТ	3000K to 6500K
body	aluminum
efficiency (real)	> 130lm/W
ifespan	> 100.000h
ngress protection	IP40
mpact protection	IK08
working temp.	-20ºC to +50ºC
nstallation	surface ceiling or suspended
mounting height	from 3m to 10m

Polar Diagram



^{*}other configurations can be customized

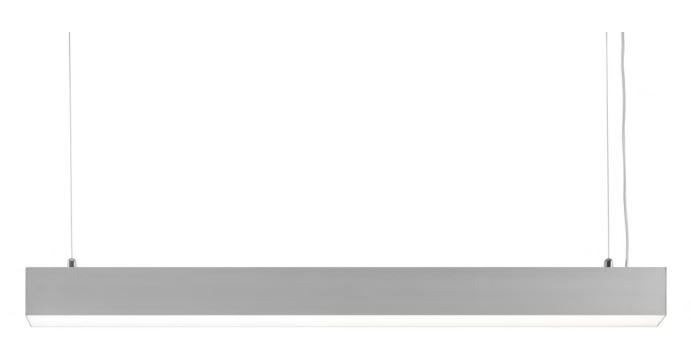





2018 Parque Ciência e Inovação Ílhavo, Portugal